


Frese a 2 taglienti per cave, serie lunga

Langlochfräser 2-Schneiden lang

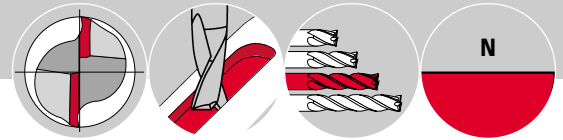


**Tipo N, ≈ 30° elica,
10° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**

Slot drills 2-fluted, long series
Type N, helix angle ≈ 30° rake angle 10°,
with straight shank acc. DIN 1835/1

Typ N, ≈ 30° Drallwinkel,
10° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1

Fraises à rainurer 2 dents, série longue
Type N, angle d'hélice ≈ 30°, angle de
coupe 10°, avec queue cylindrique
selon DIN 1835/1



ILICO NORM HSS-Co8

- HSS-Co8
- HSS-Co8
TiN
- HSS-Co8
TiCN
- HSS-Co8
TiAlN FUTURA®

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					3204	3206	3204T	3204C	3204F
ϕd_1 e_8	l_2	l_1	ϕd_2	Z					
3	8	56	6	2	●	●	●	●	●
3,5*	10	59	6	2	●	●	●	●	●
4	11	63	6	2	●	●	●	●	●
4,5*	11	63	6	2	●	●	●	●	●
5	13	68	6	2	●	●	●	●	●
5,5*	13	68	6	2	●	●	●	●	●
6	13	68	6	2	●	●	●	●	●
6,5*	16	80	10	2	●	●	●	●	●
7	16	80	10	2	●	●	●	●	●
7,5*	16	80	10	2	●	●	●	●	●
8	19	88	10	2	●	●	●	●	●
8,5*	19	88	10	2	●	●	●	●	●
9*	19	88	10	2	●	●	●	●	●
9,5*	19	88	10	2	●	●	●	●	●
10	22	95	10	2	●	●	●	●	●
10,5*	22	102	12	2	●	■	●	●	●
11	22	102	12	2	●	●	●	●	●
11,5*	22	102	12	2	■	■	■	■	■
12	22	102	12	2	●	●	●	●	●
13*	22	102	12	2	●	●	●	●	●
14	22	102	12	2	●	●	●	●	●
15*	26	110	12	2	●	●	●	●	●
16	32	123	16	2	●	●	●	●	●
17*	32	123	16	2	●	●	●	●	●
18	32	123	16	2	●	●	●	●	●
19*	32	123	16	2	●	●	●	●	●
20	38	141	20	2	●	●	●	●	●
22	38	141	20	2	●	●	●	●	●
24	45	166	25	2	●	●	●	●	●
25	45	166	25	2	●	●	●	●	●
26*	45	166	25	2	●	●	●	●	●
28	45	166	25	2	●	●	●	●	●
30*	45	166	25	2	●	●	●	●	●
32	53	186	32	2	●	●	●	●	●
34*	53	186	32	2	●	●	●	●	●
35*	53	186	32	2	■	■	■	■	■
36	53	186	32	2	●	●	●	●	●
40	63	196	40	2	●	●	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock
 * Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10