
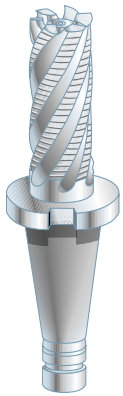


Frese frontali, serie lunga

Schafffräser lange Ausführung

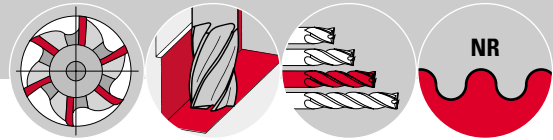


**Tipo NR, ≈ 30° elica,
12° angolo di spoglia,
con codolo conico ISO
secondo DIN 2080**

End mills, long series
Type NR, helix angle ≈ 30° rake angle 12°,
with step ISO taper shank acc. DIN 2080

**Typ NR, ≈ 30° Drallwinkel,
12° Spanwinkel,
mit Steilkegelschaft nach
DIN 2080**

Fraises deux tailles, série longue
Type NR, angle d'hélice ≈ 30°, angle
de coupe 12°, avec queue cône SA
DIN 2080



**DIN 2328L
HSS-Co5**

HSS-Co5

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.							9508
$\varnothing d_1$ K ₁₂	l_2	l_1	ISO	F	l_3	Z	
32	106	241	40	M 16	148	6	
36	106	241	40	M 16	148	6	●
40	125	260	40	M 16	167	6	■
40 [▲]	100	277	50	M 24	150	6	●
40	125	302	50	M 24	175	6	■
40 [▲]	160	337	50	M 24	210	6	●
45	125	260	40	M 24	167	8	●
45 [▲]	100	277	50	M 16	150	8	■
45	125	302	50	M 24	175	8	■
45 [▲]	160	337	50	M 24	210	8	■
50	150	285	40	M 16	192	8	■
50 [▲]	112	289	50	M 24	162	8	●
50	150	327	50	M 24	200	8	■
56	150	327	40	M 16	192	8	●
56 [▲]	112	289	50	M 16	162	8	■
56 [▲]	200	377	50	M 24	250	8	■
63 [▲]	140	317	50	M 24	190	8	■
63	180	357	50	M 24	230	8	●
63 [▲]	250	427	50	M 24	300	8	■
75 [▲]	150	327	50	M 24	200	10	■
75 [▲]	200	377	50	M 24	250	10	■
75 [▲]	250	427	50	M 24	300	10	■
75 [▲]	250	477	50	M 24	350	10	■
80 [▲]	160	337	50	M 24	210	10	■
80	212	389	50	M 24	262	10	■
80 [▲]	250	427	50	M 24	300	10	■
80 [▲]	300	477	50	M 24	350	10	■

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock
 ▲ ILLICO NORM