


Frese a 3 taglienti per cave, serie corta

Langlochfräser 3-Schneiden kurz

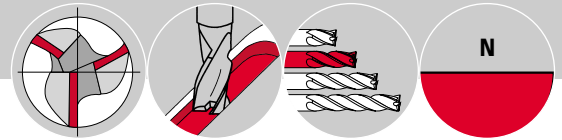


**Tipo N, ≈ 30° elica,
12° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**

Slot drills 3-fluted, short series
Type N, helix angle ≈ 30° rake angle 12°,
with straight shank acc. DIN 1835/1

Typ N, ≈ 30° Drallwinkel,
12° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1

Fraises à rainurer 3 dents, série courte
Type N, angle d'hélice ≈ 30°, angle de
coupe 12°, avec queue cylindrique selon
DIN 1835/1



**DIN 844K
ASP-60**

- ASP-60
- ASP-60
TiN
- ASP-60
TiCN
- ASP-60
TIALN FUTURA®

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					3320	3320T	3320C	3320F
Ød1 e ₈	l₂	l₁	Ød₂	Z				
2	7	51	6	3	●	●	●	●
2,5	8	52	6	3	●	●	●	●
3	8	52	6	3	●	●	●	●
3,5*	10	54	6	3	●	●	●	●
4	11	55	6	3	●	●	●	●
4,5*	11	55	6	3	●	●	●	●
5	13	57	6	3	●	●	●	●
5,5*	13	57	6	3	●	●	●	●
6	13	57	6	3	●	●	●	●
6,5*	16	66	10	3	●	●	●	●
7	16	66	10	3	●	●	●	●
7,5*	16	66	10	3	●	●	●	●
8	19	69	10	3	●	●	●	●
8,5*	19	69	10	3	●	●	●	●
9	19	69	10	3	●	●	●	●
9,5*	19	69	10	3	●	●	●	●
10	22	72	10	3	●	●	●	●
10,5*	22	72	12	3	●	●	●	●
11	22	79	12	3	●	●	●	●
11,5*	26	79	12	3	●	●	●	●
12	26	83	12	3	●	●	●	●
13*	26	83	12	3	●	●	●	●
14	26	83	12	3	●	●	●	●
15	26	83	12	3	●	●	●	●
16	32	92	16	3	●	●	●	●
17	32	92	16	3	●	●	●	●
18	32	92	16	3	●	●	●	●
19	32	92	16	3	●	●	●	●
20	38	104	20	3	●	●	●	●
22	38	104	20	3	●	●	●	●
24	45	121	25	3	●	●	●	●
25	45	121	25	3	●	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock

* Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10