


# Frese a 3 taglienti per cave, serie lunga

## Langlochfräser 3-Schneiden lang




**Tipo N,  $\approx 30^\circ$  elica,  
12° angolo di spoglia,  
con codolo cilindrico  
secondo DIN 1835/1**

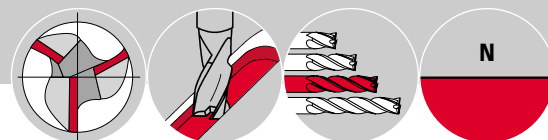


**Slot drills 3-fluted, long series**  
Type N, helix angle  $\approx 30^\circ$  rake angle  $12^\circ$ ,  
with straight shank acc. DIN 1835/1







**Typ N,  $\approx 30^\circ$  Drallwinkel,  
12° Spanwinkel,  
mit Zylinderschaft nach  
DIN 1835/1**

**Fraises à rainurer 3 dents, série longue**  
Type N, angle d'hélice  $\approx 30^\circ$ , angle  
de coupe  $12^\circ$ , avec queue cylindrique  
selon DIN 1835/1



**ILICO NORM  
HSS-Co8**

-  HSS-Co8
-  HSS-Co8  
TiN
-  HSS-Co8  
TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					3304	3304T	3304C
$\varnothing d_1$ e <sub>8</sub>	l <sub>2</sub>	l <sub>1</sub>	$\varnothing d_2$	Z	 	 	 
2,8*	8	56	6	3	●	●	●
3	8	56	6	3	●	●	●
3,5*	10	59	6	3	●	●	●
3,8*	11	63	6	3	●	●	●
4	11	63	6	3	●	●	●
4,5*	11	63	6	3	●	●	●
4,8*	13	68	6	3	●	●	●
5	13	68	6	3	●	●	●
5,5*	13	68	6	3	●	●	●
5,75*	13	68	6	3	●	●	●
6	13	68	6	3	●	●	●
6,5*	16	80	10	3	●	●	●
6,75*	16	80	10	3	●	●	●
7	16	80	10	3	●	●	●
7,75*	19	88	10	3	●	●	●
8	19	88	10	3	●	●	●
8,7*	19	88	10	3	●	●	●
9*	19	88	10	3	●	●	●
9,7*	22	95	10	3	●	●	●
10*	22	95	10	3	●	●	●
10,7*	22	102	12	3	●	●	●
11*	22	102	12	3	●	●	●
11,7*	26	110	12	3	●	●	●
12	26	110	12	3	●	●	●
12,7*	26	110	12	3	●	●	●
13*	26	110	12	3	●	●	●
13,7*	26	110	12	3	●	●	●
14	26	110	12	3	●	●	●
14,7*	26	110	12	3	●	●	●
15*	26	110	12	3	●	●	●
15,7*	32	123	16	3	●	●	●
16	32	123	16	3	●	●	●
16,7*	32	123	16	3	●	●	●
17*	32	123	16	3	●	●	●
17,7*	32	123	16	3	●	●	●
18	32	123	16	3	●	●	●
18,7*	32	123	16	3	●	●	●
19*	32	123	16	3	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock

\* Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10