


Frese a 3 taglienti per cave, serie lunga

Langlochfräser 3-Schneiden lang




**Tipo N, ≈ 30° elica,
12° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**

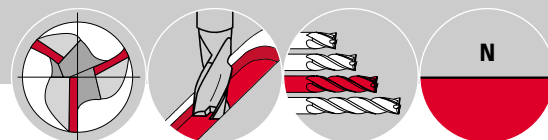

Slot drills 3-fluted, long series
Type N, helix angle ≈ 30° rake angle 12°,
with straight shank acc. DIN 1835/1







Typ N, ≈ 30° Drallwinkel,
12° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1

Fraises à rainurer 3 dents, série longue
Type N, angle d'hélice ≈ 30°, angle de
coupe 12°, avec queue cylindrique
selon DIN 1835/1



ILICO NORM ASP-60

-  ASP-60
-  ASP-60
TiN
-  ASP-60
TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					3324	3324T	3324C
ϕd_1 e ₈	l_2	l_1	ϕd_2	Z			
							
3	8	56	6	3	■	■	■
3,5*	10	59	6	3	■	■	■
4	11	63	6	3	■	■	■
4,5*	11	63	6	3	■	■	■
5	13	68	6	3	■	■	■
5,5*	13	68	6	3	■	■	■
6	13	68	6	3	■	■	■
6,5*	16	80	10	3	■	■	■
7	16	80	10	3	■	■	■
7,5*	16	80	10	3	■	■	■
8	19	88	10	3	■	■	■
8,5*	19	88	10	3	■	■	■
9	19	88	10	3	■	■	■
9,5*	19	88	10	3	■	■	■
10	22	95	10	3	■	■	■
10,5*	22	95	12	3	■	■	■
11	22	95	12	3	■	■	■
11,5*	22	95	12	3	■	■	■
12	26	110	12	3	■	■	■
13*	26	110	12	3	■	■	■
14	26	110	12	3	■	■	■
15	26	110	12	3	■	■	■
16	32	123	16	3	■	■	■
17	32	123	16	3	■	■	■
18	32	123	16	3	■	■	■
19	32	123	16	3	■	■	■
20	38	141	20	3	■	■	■
22	38	141	20	3	■	■	■
24	45	166	25	3	■	■	■
25	45	166	25	3	■	■	■

■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock
* Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10