


Frese frontali per leghe leggere serie corta

Schafffräser kurz, 3-Schneiden

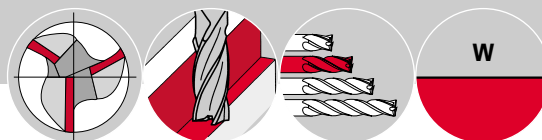


**Tipo W, ≈ 40° elica,
24° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**

Endmills, 3-fluted, short series
Type W, helix angle ≈ 40° rake angle
24°, with straight shank acc. DIN 1835/1

**Typ W, ≈ 40° Drallwinkel,
24° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1**

Fraises deux tailles, 3 dents, série courte
Type W, angle d'hélice ≈ 40°, angle de
coupe 24°, avec queue cylindrique
selon DIN 1835/1



**DIN 844K
HSS-Co8**

- HSS-Co8
- HSS-Co8
TIN
- HSS-Co8
TiCN
- HSS-Co8
TiAlN FUTURA®

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					4300	4302	4300T	4300C	4300F
Ød1 K10	l2	l1	Ød2	Z					
2	7	51	6	3	●	●	●	●	●
2,5	8	52	6	3	■	■	■	■	■
3	8	52	6	3	●	●	●	●	●
3,5	10	54	6	3	■	■	■	■	■
4	11	55	6	3	●	●	●	●	●
4,5	11	55	6	3	■	■	■	■	■
5	13	57	6	3	●	●	●	●	●
6	13	57	6	3	●	●	●	●	●
7	16	66	10	3	●	●	●	●	●
8	19	69	10	3	●	●	●	●	●
9	19	69	10	3	●	●	●	●	●
10	22	72	10	3	●	●	●	●	●
11	22	79	12	3	■	■	■	■	■
12	26	83	12	3	●	●	●	●	●
13	26	83	12	3	■	■	■	■	■
14	26	83	12	3	●	●	●	●	●
15	26	83	12	3	■	■	■	■	■
16	32	92	16	3	●	●	●	●	●
17	32	92	16	3	■	■	■	■	■
18	32	92	16	3	●	●	●	●	●
19	32	92	16	3	●	■	■	■	■
20	38	104	20	3	●	●	●	●	●
22	38	104	20	3	●	●	●	●	●
24	45	121	25	3	●	●	●	●	●
25	45	121	25	4	●	●	●	●	●
26	45	121	25	4	●	●	●	●	●
28	45	121	25	4	●	●	●	●	●
30	45	121	25	4	●	●	●	●	●
32	53	133	32	4	●	●	●	●	●
34	53	133	32	4	●	■	■	■	■
35	53	133	32	4	●	■	■	■	■
36	53	133	32	4	●	■	●	●	●
40*	63	143	32	4	●	■	●	●	●
40	63	155	40	4	●	●	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock