


Frese frontali per leghe leggere, serie lunga

Schafffräser lang, 3-Schneiden




**Tipo W, ≈40° elica,
24° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**

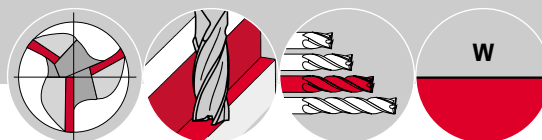


End mills 3-fluted, long series
Type W, helix angle ≈ 40° rake angle 24°,
with straight shank acc. DIN 1835/1







**Typ W, ≈ 40° Drallwinkel,
24° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1**

Fraises deux tailles 3 dents, série longue
Type W, angle d'éllice ≈ 40°, angle de
coupe 24°, avec queue cylindrique
selon DIN 1835/1



**DIN 844L
HSS-Co8**

-  HSS-Co8
-  HSS-Co8
TiN
-  HSS-Co8
TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					4304	4304T	4304C
$\varnothing d_1$ K ₁₀	l_2	l_1	$\varnothing d_2$	Z			
							
3	12	56	6	3	●	●	●
3,5	15	59	6	3	■	■	■
4	19	63	6	3	●	●	●
4,5	19	63	6	3	■	■	■
5	24	68	6	3	●	●	●
6	24	68	6	3	●	●	●
7	30	80	10	3	●	●	●
8	38	88	10	3	●	●	●
9	38	88	10	3	●	●	●
10	45	95	10	3	●	●	●
11	45	102	12	3	■	■	●
12	53	110	12	3	●	●	●
13	53	110	12	3	■	■	■
14	53	110	12	3	●	●	●
15	53	110	12	3	■	■	●
16	63	123	16	3	●	●	●
18	63	123	16	3	●	●	●
20	75	141	20	3	●	●	●
22	75	141	20	3	●	●	●
24	90	166	25	3	●	●	●
25	90	166	25	4	●	●	●
26	90	166	25	4	■	■	■
28	90	166	25	4	●	●	●
30	90	166	25	4	●	●	●
32	106	186	32	4	●	●	●
36	106	186	32	4	●	●	●
40	125	217	40	4	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock