



Frese frontali per leghe leggere, serie corta

Schafffräser kurz, 3-Schneiden




Tipo WF, $\approx 40^\circ$ elica, 24° angolo di spoglia, con codolo cilindrico secondo DIN 1835/1

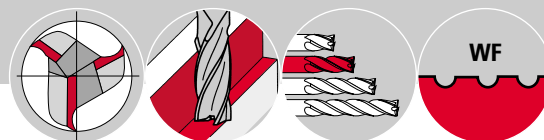


End mills, 3-fluted, short series
Type WF, helix angle $\approx 40^\circ$ rake angle 24° , with straight shank acc. DIN 1835/1







Typ WF, $\approx 40^\circ$ Drallwinkel, 24° Spanwinkel, mit Zylinderschaft nach DIN 1835/1

Fraises deux tailles, 3 dents, série courte
Type WF, angle d'hélice $\approx 40^\circ$, angle de coupe 24° , avec queue cylindrique selon DIN 1835/1



**DIN 844K
HSS-Co5**

-  HSS-Co5
-  HSS-Co5 TiN
-  HSS-Co5 TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					5300	5300T	5300C
$\emptyset d_1$ K ₁₀	l_2	l_1	$\emptyset d_2$	Z	 	 	 
6	13	57	6	3	●	●	●
8	19	69	10	3	●	●	●
10	22	72	10	3	●	●	●
12	26	83	12	3	●	●	●
14	26	83	12	3	●	●	●
16	32	92	16	3	●	●	●
18	32	92	16	3	●	●	●
20	38	104	20	3	●	●	●
25	45	121	25	3	●	●	●
28	45	121	25	3	■	■	■
30	45	121	25	3	■	■	■
32	53	133	32	3	■	■	■
36	53	133	32	3	■	■	■

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock