


Frese frontali, serie corta

Schaftfräser kurze Ausführung




**Tipo HS $\approx 30^\circ$ elica,
6° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**

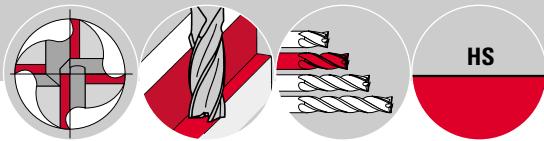


End mills, short series

Type HS, helix angle $\approx 30^\circ$ rake angle 6° ,
with straight shank acc. DIN 1835/1

Type HS, $\approx 30^\circ$ Drallwinkel,
 6° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1



**DIN 844K
HSS-Co8**



Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					4408	4408C	4408F
Ød1 k ₁₀	l ₂	l ₁	Ød ₂	Z			
2	7	51	6	4	●	●	●
2,5	8	52	6	4	●	●	●
3	8	52	6	4	●	●	●
3,5	10	54	6	4	●	●	●
4	11	55	6	4	●	●	●
4,5	11	55	6	4	●	●	●
5	13	57	6	4	●	●	●
6	13	57	6	4	●	●	●
7	16	66	10	4	●	●	●
8	19	69	10	4	●	●	●
9	19	69	10	4	●	●	●
10	22	72	10	4	●	●	●
11	22	79	12	4	●	●	●
12	26	83	12	4	●	●	●
13	26	83	12	4	●	●	●
14	26	83	12	4	●	●	●
15	26	83	12	4	●	●	●
16	32	92	16	4	●	●	●
17	32	92	16	4	●	●	●
18	32	92	16	4	●	●	●
19	32	92	16	4	●	●	●
20	38	104	20	4	●	●	●
22	38	104	20	4	●	●	●
24	45	121	25	5	●	●	●
25	45	121	25	5	●	●	●
28	45	121	25	5	●	●	●
30	45	121	25	5	■	■	

- Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab Lager - Outil disponible à stock
- Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock