


## **Frese a 2 taglienti per cave, serie extra corta**

#### **Langlochfräser 2-Schneiden extra kurz**




**Tipo N,  $\approx 30^\circ$  elica,  
10° angolo di spoglia,  
con codolo cilindrico  
secondo DIN 1835/1**

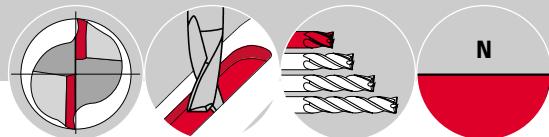


## **Slot drills 2-fluted, extra short series**

Type N, helix angle  $\approx 30^\circ$  rake angle  $10^\circ$ ,  
with straight shank acc. DIN 1835/1

Typ N,  $\approx 30^\circ$  Drallwinkel,  
 $10^\circ$  Spanwinkel,  
mit Zylinderschaft nach  
DIN 1835/1

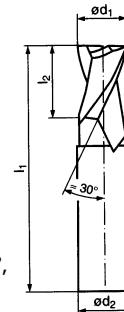

**DIN 327**  
**HSS-Co8**



Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					3200	3201	3200T	3201C	3200C	3200F
Ød1 e8	l2	l1	Ød2	Z						
15*	16	73	12	2	●	●	●	●	●	●
15,7*	19	79	16	2	●	●	●	●	●	●
16	19	79	16	2	●	●	●	●	●	●
16,7*	19	79	16	2	●	●	●	●	●	●
17	19	79	16	2	●	●	●	●	●	●
17,7*	19	79	16	2	●	●	●	●	●	●
18	19	79	16	2	●	●	●	●	●	●
18^	19	85	20	2		●			●	
19*	19	79	16	2	●	●	●	●	●	●
19,7*	22	88	20	2	●	●	●	●	●	●
20	22	88	20	2	●	●	●	●	●	●
21,7*	22	88	20	2	●	●	●	●	●	●
22	22	88	20	2	●	●	●	●	●	●
23,7*	26	102	25	2	●	●	●	●	●	●
24	26	102	25	2	●	●	●	●	●	●
24,7*	26	102	25	2	●	●	●	●	●	●
25	26	102	25	2	●	●	●	●	●	●
26	26	102	25	2	●	●	●	●	●	●
27,7*	26	102	25	2	●	●	●	●	●	●
28	26	102	25	2	●	●	●	●	●	●
29,7*	26	102	25	2	●	●	●	●	●	●
30	26	102	25	2	●	●	●	●	●	●
32	32	112	32	2	●	●	●	●	●	●
34*	32	112	32	2	●	●	●	●	●	●
35*	32	112	32	2	●	●	●	●	●	●
36	32	112	32	2	●	●	●	●	●	●
38^*	38	118	32	2		●			●	
40^	38	118	32	2		●			●	
40	38	130	40	2	●		●	●	●	●
42^*	38	118	32	2		●			●	
44^*	38	118	32	2		●			●	
45^	38	118	32	2		●			●	
48^*	45	125	32	2		●			●	
50^	45	125	32	2		●			●	

- Utensile disponibile a magazzino - Tool in stock - Werkzeug vorratig ab Lager - Outil disponible à stock

\* Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10

▲ ILLICO NORM