



Frese a 2 taglienti per cave, serie extra corta

Langlochfräser 2-Schneiden extra kurz

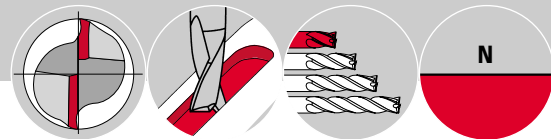

**Tipo N, ≈ 30° elica,
10° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**




**Slot drills 2-fluted,
extra short series**

Type N, helix angle ≈ 30° rake angle 10°,
with straight shank acc. DIN 1835/1





Typ N, ≈ 30° Drallwinkel,
10° Spanwinkel,
mit Zylinderschaft nach
DIN 1835/1









**Fraises à rainurer 2 dents,
série extra courte**

Type N, angle d'hélice ≈ 30°, angle de
coupe 10°, avec queue cylindrique selon
DIN 1835/1



**DIN 327
ASP-60**

-  ASP-60
-  ASP-60
TiN
-  ASP-60
TiCN
-  ASP-60
TIALN FUTURA®

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					3220	3220T	3220C	3220F
								
								
Ød1 eg	l₂	l₁	Ød₂	Z				
2	4	48	6	2	●	●	●	●
2,5	5	49	6	2	●	●	●	●
3	5	49	6	2	●	●	●	●
3,5*	6	50	6	2	●	●	●	●
4	7	51	6	2	●	●	●	●
4,5*	7	51	6	2	●	●	●	●
5	8	52	6	2	●	●	●	●
5,5*	8	52	6	2	●	●	●	●
6	8	52	6	2	●	●	●	●
6,5*	10	60	10	2	●	●	●	●
7	10	60	10	2	●	●	●	●
7,5*	10	60	10	2	●	●	●	●
8	11	61	10	2	●	●	●	●
8,5*	11	61	10	2	●	●	●	●
9	11	61	10	2	●	●	●	●
9,5*	11	61	10	2	●	●	●	●
10	13	63	10	2	●	●	●	●
10,5*	13	70	12	2	●	●	●	●
11	13	70	12	2	●	●	●	●
11,5*	13	70	12	2	●	●	●	●
12	16	73	12	2	●	●	●	●
13*	16	73	12	2	●	●	●	●
14	16	73	12	2	●	●	●	●
15	16	73	12	2	●	●	●	●
16	19	79	16	2	●	●	●	●
17	19	79	16	2	●	●	●	●
18	19	79	16	2	●	●	●	●
19	19	79	16	2	●	●	●	●
20	22	88	20	2	●	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock

* Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10