


DIN 338



СВЕРЛА СРЕДНЕЙ ДЛИНЫ

Сверла с гладким цилиндрическим хвостовиком из быстрорежущей стали HSS

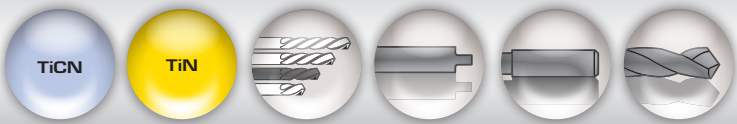

Обозначение		6151	6151TN	6106	6187	6197	6210	6210TN	6210TC	6158	6190	6199	6209
Тип		N	N	NML	H	W	STL	STL	STL	N	H	W	STL
Направление вращения													
Материал сверла		HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS
Ø, мм	Ø, дюймы	№ Ø по ANSI*	I <sub>1</sub> , мм	I <sub>2</sub> , мм									
1,67		43	20										
1,68		43	20										
1,69		43	20										
1,7		43	20										
1,702	51	46	22										
1,71		46	22										
1,72		46	22										
1,73		46	22										
1,74		46	22										
1,75		46	22										
1,76		46	22										
1,77		46	22										
1,778	50	46	22										
1,78		46	22										
1,79		46	22										
1,8		46	22										
1,81		46	22										
1,82		46	22										
1,83		46	22										
1,84		46	22										
1,85		46	22										
1,854	49	46	22										
1,86		46	22										
1,87		46	22										
1,88		46	22										
1,89		46	22										
1,9		46	22										
1,91		49	24										
1,92		49	24										
1,93		49	24										
1,930	48	49	24										
1,94		49	24										

● В наличии на складе.

\* Обозначение диаметра (литера или номер) по ANSI/ASME B 94.11 M.