


DIN 212 A/C-B/D-E



Maschinen-Reibahlen mit Zylinderschaft aus HSS-Co für Bohrungen mit Passung H7

Machine chucking reamers with straight shank, made of HSS-Co to produce holes with H7 tolerance

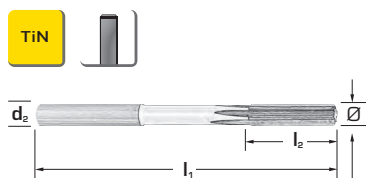

Form / Form				A/C	E	B/D	B/D
Typ / Type				Schneiden gerade straight	Schneiden 45° LH	Schneiden 7/8° LH	Schneiden 7/8° LH
Schneidrichtung Cutting direction							
Schneidstoff Material				HSS-Co	HSS-Co	HSS-Co	HSS-Co
Ø mm	l ₁ mm	l ₂ mm	d ₂ h9	6321	6325	6326	6326 TN
1,0	37	5	1,0	●	●	●	●
1,1	40	7	1,1	●	●	●	●
1,2	40	7	1,2	●	●	●	●
1,3	40	7	1,3	●	●	●	●
1,4	40	8	1,4	●	●	●	●
1,5	40	8	1,5	●	●	●	●
1/16"	43	9	1,588	-	-	●	●
1,6	43	9	1,6	●	●	●	●
1,7	43	9	1,7	●	●	●	●
1,8	46	10	1,8	●	●	●	●
1,9	46	10	1,9	●	●	●	●
2,0	49	11	2,0	●	●	●	●
2,1	49	11	2,1	●	●	●	●
2,2	53	12	2,2	●	●	●	●
2,3	53	12	2,3	●	●	●	●
3/32"	57	14	2,382	-	-	●	●
2,4	57	14	2,4	●	●	●	●
2,5	57	14	2,5	●	●	●	●
2,6	57	14	2,6	●	●	●	●
2,7	61	15	2,7	●	●	●	●
7/64"	61	15	2,779	-	-	●	●
2,8	61	15	2,8	●	●	●	●
2,9	61	15	2,9	●	●	●	●
3,0	61	15	3,0	●	●	●	●
3,1	65	16	3,1	●	●	●	●
1/8"	65	16	3,175	-	-	●	●
3,2	65	16	3,2	●	●	●	●
3,3	65	18	3,3	●	●	●	●
3,4	70	18	3,4	●	●	●	●
3,5	70	18	3,5	●	●	●	●
3,6	70	18	3,6	●	●	●	●
3,7	70	18	3,7	●	●	●	●
3,8	75	19	4,0	●	●	●	●
3,9	75	19	4,0	●	●	●	●
4,0	75	19	4,0	●	●	●	●
4,1	75	19	4,0	●	●	●	●
4,2	75	19	4,0	●	●	●	●
4,3	80	21	4,5	●	●	●	●

*ILIX Standard

● Standardartikel / Items available ex stock