


DIN 212 A/C-B/D-E



Maschinen-Reibahlen mit Zylinderschaft aus HSS-Co für Bohrungen mit Passung H7

Machine chucking reamers with straight shank, made of HSS-Co to produce holes with H7 tolerance

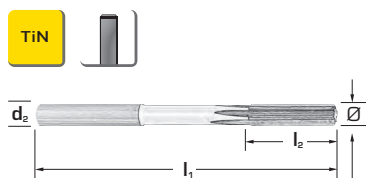

Form / Form				A/C	E	B/D	B/D
Typ / Type				Schneiden gerade straight	Schneiden 45° LH	Schneiden 7/8° LH	Schneiden 7/8° LH
Schneidrichtung Cutting direction							
Schneidstoff Material				HSS-Co	HSS-Co	HSS-Co	HSS-Co
Ø mm	l ₁ mm	l ₂ mm	d ₂ h9	6321	6325	6326	6326 TN
5/16"	117	33	8,0	-	-	●	●
8,0	117	33	8,0	●	●	●	●
8,1	117	33	8,0	●	●	●	●
8,2	117	33	8,0	●	●	●	●
8,3	117	33	8,0	●	●	●	●
8,4	117	33	8,0	●	●	●	●
8,5	117	33	8,0	●	●	●	●
8,6	125	36	9,0	●	●	●	●
8,7	125	36	9,0	●	●	●	●
8,8	125	36	9,0	●	●	●	●
8,9	125	36	9,0	●	●	●	●
9,0	125	36	9,0	●	●	●	●
9,1	125	36	9,0	●	●	●	●
9,2	125	36	9,0	●	●	●	●
9,3	125	36	9,0	●	●	●	●
9,4	125	36	9,0	●	●	●	●
9,5	125	36	9,0	●	●	●	●
3/8"	133	38	10,0	-	-	●	●
9,6	133	38	10,0	●	●	●	●
9,7	133	38	10,0	●	●	●	●
9,8	133	38	10,0	●	●	●	●
9,9	133	38	10,0	●	●	●	●
10,0	133	38	10,0	●	●	●	●
10,1	133	38	10,0	●	●	●	●
10,2	133	38	10,0	●	●	●	●
10,3	133	38	10,0	●	●	●	●
10,4	133	38	10,0	●	●	●	●
10,5	133	38	10,0	●	●	●	●
10,6	133	38	10,0	●	●	●	●
10,7	142	41	10,0	●	●	●	●
10,8	142	41	10,0	●	●	●	●
10,9	142	41	10,0	●	●	●	●
11,0	142	41	10,0	●	●	●	●
11,5	142	41	10,0	●	●	●	●
12,0	151	44	10,0	●	●	●	●
12,5	151	44	10,0	●	●	●	●
1/2"	151	44	10,0	-	-	●	●
13,0	151	44	10,0	●	●	●	●

● Standardartikel / Items available ex stock