


DIN 212 A/C-B/D-E



Maschinen-Reibahlen mit Zylinderschaft aus HSS-Co für Bohrungen mit Passung H7

Machine chucking reamers with straight shank, made of HSS-Co to produce holes with H7 tolerance

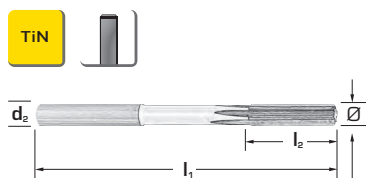

Form / Form				A/C	E	B/D	B/D
Typ / Type				Schneiden gerade straight	Schneiden 45° LH	Schneiden 7/8° LH	Schneiden 7/8° LH
Schneidrichtung Cutting direction							
Schneidstoff / Material				HSS-Co	HSS-Co	HSS-Co	HSS-Co
Ø mm	l ₁ mm	l ₂ mm	d ₂ h9	6321	6325	6326	6326 TN
13,5	160	47	12,5	●	●	●	●
14,0	160	47	12,5	●	●	●	●
14,5	162	50	12,5	●	●	●	●
15,0	162	50	12,5	●	●	●	●
15,5	170	52	12,5	●	●	●	●
5/8"	170	52	12,5	-	-	●	●
16,0	170	52	12,5	●	●	●	●
16,5	175	54	14,0	●	●	●	●
17,0	175	54	14,0	●	●	●	●
17,5	182	56	14,0	●	●	●	●
18,0	182	56	14,0	●	●	●	●
18,5	189	58	16,0	●	●	●	●
19,0	189	58	16,0	●	●	●	●
3/4"	195	60	16,0	-	-	●	●
19,5	195	60	16,0	●	●	●	●
20,0	195	60	16,0	●	●	●	●

Durchmesser Diameter range	6321 Anzahl der Schneiden No. of cutting lips	6325 Anzahl der Schneiden No. of cutting lips	6326 Anzahl der Schneiden No. of cutting lips	6326TN Anzahl der Schneiden No. of cutting lips
0,6 mm - 2,4 mm	3	2	3	3
2,5 mm - 3,9 mm	5	3	5	5
4,0 mm - 13,5 mm	6	3	6	6
13,5 mm - 14,5 mm	8	3	8	8
15,0 mm - 20,0 mm	8	4	8	8

**ILIX Standard

● Standardartikel / Items available ex stock