


FRESA PER FIBRE DI VETRO IN METALLO DURO

FIBERGLASS ROUTERS
KONTURENFRÄSER-DIAMANTVERZÄHNUNG
FRAISER POUR CONTOUR-À DENTURE DIAMANT
FRESAS EN FIBRA DE VIDRIO

TALICARB NORM - SERIE NORMALE

TALICARB NORM - NORMAL SERIES
TALICARB NORM - NORMAL AUSFÜHRUNG
TALICARB NORM - SÉRIE NORMALE
TALICARB NORM - SERIE NORMAL

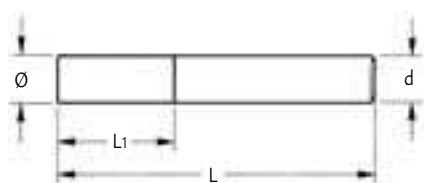

2400



NEW

2401



NEW

2402




NEW

2403




NEW

				
				2400
Ø	d	L1	L	€
mm	mm	mm	mm	

2	3	6	38	14,37
3	3	12	38	13,37
4	4	16	50	21,45
6	6	25	63	24,55
6	6	25	76	31,20
8	8	25	63	48,30
10	10	25	70	60,00
12	12	25	76	84,50

				
				2401
Ø	d	L1	L	€
mm	mm	mm	mm	

2	3	6	38	16,30
3	3	12	38	14,85
4	4	16	50	23,75
6	6	25	63	27,75
6	6	25	76	33,90
8	8	25	63	51,50
10	10	25	70	65,40
12	12	25	76	92,90

				
				2402
Ø	d	L1	L	€
mm	mm	mm	mm	

2	3	6	38	17,65
3	3	12	38	16,20
4	4	16	50	25,95
6	6	25	63	29,30
6	6	25	76	35,50
8	8	25	63	53,40
10	10	25	70	67,80
12	12	25	76	97,40

				
				2403
Ø	d	L1	L	€
mm	mm	mm	mm	

2	3	6	38	18,65
3	3	12	38	17,15
4	4	16	50	26,95
6	6	25	63	30,35
6	6	25	76	36,70
8	8	25	63	55,00
10	10	25	70	70,40
12	12	25	76	102,00

PARAMETRI DI TAGLIO
CUTTING PARAMETERS • SCHNITTDATEN
PARAMÈTRES DE COUPE • PARAMETROS DE CORTE

Ø mm	Vc m/min	mm/giro
2-3	230 - 350	0,04 - 0,06
4-6	185 - 275	0,04 - 0,06
8-12	185 - 275	0,04 - 0,06