



# Frese semisferiche a 2 taglienti, serie lunga

## Radiusschaftfräser 2-Schneiden lang

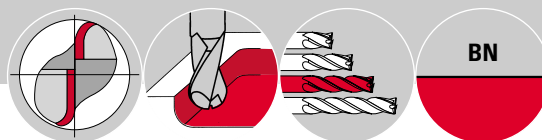


**Tipo BN, ≈ 30° elica, con codolo cilindrico secondo DIN 1835/1**

**Ball nose cutter 2-fluted, long series**  
Type BN, helix angle ≈ 30°, with straight shank acc. DIN 1835/1







Typ BN, ≈ 30° Drallwinkel, mit Zylindereshaft nach DIN 1835/1

**Fraises à bout hémisphérique, 2 dents, série longue**  
Type BN, angle d'hélice ≈ 30°, avec queue cylindrique selon DIN 1835/1



### ILICO NORM ASP-60

-  ASP-60
-  ASP-60 TiN
-  ASP-60 TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.						4224	4224T	4224C
								
								
<b>Ød1</b> h <sub>10</sub>	r	l <sub>2</sub>	l <sub>1</sub>	Ød <sub>2</sub>	Z			
<b>3</b>	1,5	8	56	6	2	●	●	●
<b>4</b>	2	11	63	6	2	●	●	●
<b>5</b>	2,5	13	68	6	2	●	●	●
<b>6</b>	3	13	68	6	2	●	●	●
<b>7</b>	3,5	16	80	10	2	●	●	●
<b>8</b>	4	19	88	10	2	●	●	●
<b>9</b>	4,5	19	88	10	2	●	●	●
<b>10</b>	5	22	95	10	2	●	●	●
<b>11</b>	5,5	22	102	12	2	●	●	●
<b>12</b>	6	26	110	12	2	●	●	●
<b>13</b>	6,5	26	110	12	2	●	●	●
<b>14</b>	7	26	110	12	2	●	●	●
<b>15</b>	7,5	26	110	12	2	●	●	●
<b>16</b>	8	32	123	16	2	●	●	●
<b>18</b>	9	32	123	16	2	●	●	●
<b>20</b>	10	38	141	20	2	●	●	●
<b>22</b>	11	38	141	20	2	●	●	●
<b>24</b>	12	45	166	25	2	●	●	●
<b>25</b>	12,5	45	166	25	2	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock