


Frese frontali per leghe leggere, serie lunga

Schaftfräser lang, 3-Schneiden

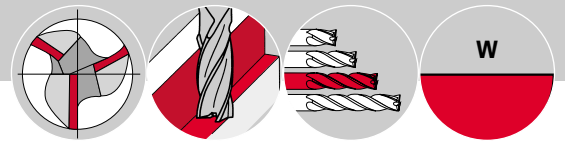


Tipo W, $\approx 40^\circ$ elica, 24° angolo di spoglia, con codolo cilindrico secondo DIN 1835/1

End mills, 3-fluted, long series
Type W, helix angle $\approx 40^\circ$ rake angle 24° , with straight shank acc. DIN 1835/1







Typ W, $\approx 40^\circ$ Drallwinkel, 24° Spanwinkel, mit Zylinderschaft nach DIN 1835/1

Fraises deux tailles, 3 dents, série longue
Type W, angle d'hélice $\approx 40^\circ$, angle de coupe 24° , avec queue cylindrique selon DIN 1835/1



DIN 844L
ASP-60

 ASP-60
 ASP-60 TiN
 ASP-60 TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					4324	4324T	4324C
							
							
$\frac{\phi d_1}{K_{10}}$	l_2	l_1	ϕd_2	Z			
3	12	56	6	3	●	●	●
4	19	63	6	3	●	●	●
5	24	68	6	3	●	●	●
6	24	68	6	3	●	●	●
7	30	80	10	3	●	●	●
8	38	88	10	3	●	●	●
9	38	88	10	3	●	●	●
10	45	95	10	3	●	●	●
11	45	102	12	3	●	●	●
12	53	110	12	3	●	●	●
13	53	110	12	3	●	●	●
14	53	110	12	3	●	●	●
15	53	110	12	3	●	●	●
16	63	123	16	3	●	●	●
18	63	123	16	3	●	●	●
20	75	141	20	3	●	●	●
22	75	141	20	3	●	●	●
24	90	166	25	3	●	●	●
25	90	166	25	4	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock