


Frese frontali per leghe leggere, serie corta

Schafffräser kurz, 3-Schneiden

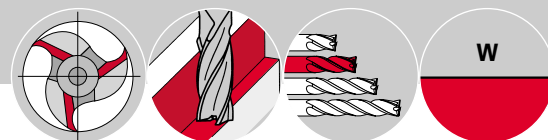


**Tipo W, $\approx 40^\circ$ elica,
24° angolo di spoglia,
con codolo conico morse
secondo DIN 228/1**


End mills, 3-fluted, short series
Type W, helix angle $\approx 40^\circ$ rake angle 24° ,
with morse taper shank acc. DIN 228/1

**Typ W, $\approx 40^\circ$ Drallwinkel,
24° Spanwinkel,
mit morsekegelshaft nach
DIN 228/1**

Fraises deux tailles, 3 dents, série courte
Type W, angle d'hélice $\approx 40^\circ$, angle de
coupe 24° , avec queue cône morse DIN 228/1



**DIN 845K
HSS-Co5**



Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.						4308	4308T	4308C
ϕd_1 K ₁₀	l_2	l_1	CM	F	Z			
10	22	92	1	M 6	3	●	●	●
11	22	92	1	M 6	3	●	●	●
12	26	96	1	M 6	3	●	●	●
13	26	96	1	M 6	3	●	●	●
14	26	111	2	M 10	3	●	●	●
15	26	111	2	M 10	3	●	●	●
16	32	117	2	M 10	3	●	●	●
17	32	117	2	M 10	3	●	●	●
18	32	117	2	M 10	3	●	●	●
19	32	117	2	M 10	3	●	●	●
20	38	123	2	M 10	3	●	●	●
21	38	123	2	M 10	3	●	●	●
22	38	123	2	M 10	3	●	●	●
23	38	123	2	M 10	3	●	●	●
24	45	147	3	M 12	3	●	●	●
25	45	147	3	M 12	4	●	●	●
26	45	147	3	M 12	4	●	●	●
27	45	147	3	M 12	4	●	●	●
28	45	147	3	M 12	4	●	●	●
29	45	147	3	M 12	4	●	●	●
30	45	147	3	M 12	4	●	●	●
32*	53	201	4	M 16	4	●	●	●
34*	53	201	4	M 16	4	●	●	●
35*	53	201	4	M 16	4	●	●	●
36*	53	201	4	M 16	4	●	●	●
38*	63	211	4	M 16	4	●	●	●
40*	63	211	4	M 16	4	●	●	●
46*	63	211	4	M 16	5	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock