


Frese frontali, serie lunga

Schaftfräser lange Ausführung

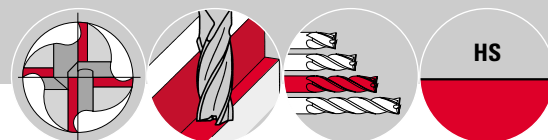


Tipo HS, ≈ 30° elica, 6° angolo di spoglia, con codolo cilindrico secondo DIN 1835/1

End mills long series
Type HS, helix angle ≈ 30° rake angle 6°, with straight shank acc. DIN 1835/1

Typ HS, ≈ 30° Drallwinkel, 6° Spanwinkel, mit Zylinderschaft nach DIN 1835/1

Fraises deux tailles série longue
Type HS, angle d'hélice ≈ 30°, angle de coupe 6°, avec queue cylindrique selon DIN 1835/1



DIN 844L
HSS-Co8



| Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat. | | | | | 4424 | 4424C |
|--|-------|-------|------------|---|------|-------|
| ϕd_1 k ₁₀ | l_2 | l_1 | ϕd_2 | Z | | |
| 4 | 19 | 63 | 6 | 4 | ● | ● |
| 5 | 24 | 68 | 6 | 4 | ● | ● |
| 6 | 24 | 68 | 6 | 4 | ● | ● |
| 8 | 38 | 88 | 10 | 4 | ● | ● |
| 10 | 45 | 95 | 10 | 4 | ● | ● |
| 12 | 53 | 110 | 12 | 4 | ● | ● |
| 14 | 53 | 110 | 12 | 4 | ● | ● |
| 16 | 63 | 123 | 16 | 4 | ● | ● |
| 18 | 63 | 123 | 16 | 4 | ● | ● |
| 20 | 75 | 141 | 20 | 4 | ● | ● |
| 22 | 75 | 141 | 20 | 5 | ● | ● |
| 25 | 90 | 166 | 25 | 5 | ● | ● |
| 26 | 90 | 166 | 25 | 5 | ■ | ■ |
| 28 | 90 | 166 | 25 | 5 | ● | ● |
| 30 | 90 | 166 | 25 | 5 | ■ | ■ |

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock