


Frese frontali, serie lunga

Schaftfräser lange Ausführung

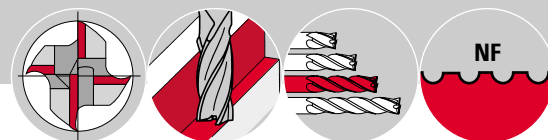

**Tipo NF, $\approx 30^\circ$ elica,
12° angolo di spoglia,
con codolo cilindrico
secondo DIN 1835/1**


End mills, long series

Type NF, helix angle $\approx 30^\circ$ rake angle 12° ,
with straight shank acc. DIN 1835/1




Typ NF, $\approx 30^\circ$ Drallwinkel,
12° Spanwinkel,
mit zylinderschaft nach
DIN 1835/1







Fraises deux tailles, série longue

Type NF, angle d'hélice $\approx 30^\circ$, angle
de coupe 12° , avec queue cylindrique
Morse selon DIN 1835/1



**DIN 844L
HSS-Co8**

-  HSS-Co8
-  HSS-Co8
TiN
-  HSS-Co8
TiCN

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					5408	5408T	5408C
ϕd_1 K ₁₂	l_2	l_1	ϕd_2	Z	 	 	 
6	24	68	6	4	●	●	●
8	38	88	10	4	●	●	●
10	45	95	10	4	●	●	●
11	45	102	12	4	●	●	●
12	53	110	12	4	●	●	●
13*	53	110	12	4	●	●	●
14*	53	110	12	4	●	●	●
15*	53	110	12	4	●	●	●
16*	63	123	16	4	●	●	●
18*	63	123	16	4	●	●	●
20*	75	141	20	4	●	●	●
22*	75	141	20	4	●	●	●
24*	90	166	25	4	●	●	●
25*	90	166	25	4	●	●	●
26*	90	166	25	5	●	●	●
28*	90	166	25	5	●	●	●
30*	90	166	25	5	●	●	●
32*	106	186	32	6	●	●	●
34*	106	186	32	6	■	●	●
35*	106	186	32	6	■	■	■
36*	106	186	32	6	■	■	■
40*	125	217	40	6	■	■	■

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock
 * Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10