


Frese frontali, serie lunga

Schaftfräser lange Ausführung

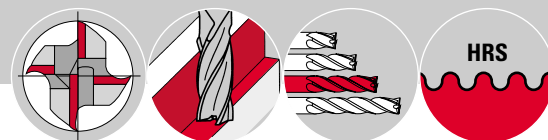

Tipo HRS, $\approx 30^\circ$ elica, 10° angolo di spoglia, con codolo cilindrico secondo DIN 1835/1


End mills, long series

Type HRS, helix angle $\approx 30^\circ$ rake angle 10° , with straight shank acc. DIN 1835/1




Typ HRS, $\approx 30^\circ$ Drallwinkel, 10° Spanwinkel, mit Zylinderschaft nach DIN 1835/1







Fraises deux tailles, série longue

Type HRS, angle d'hélice $\approx 30^\circ$, angle de coupe 10° , avec queue cylindrique selon DIN 1835/1



**DIN 844L
HSS-Co8**

-  HSS-Co8
-  HSS-Co8
TiCN
-  HSS-Co8
TiAlN FUTURA®

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.					7416	7416C	7416F
ϕd_1 k_{12}	l_2	l_1	ϕd_2	Z	 	 	 
6	24	68	6	4	●	●	●
8	38	88	10	4	●	●	●
10	45	95	10	4	●	●	●
12	53	110	12	4	●	●	●
14	53	110	12	4	●	●	●
16	63	123	16	4	●	●	●
18	63	123	16	4	●	●	●
20	75	141	20	4	●	●	●
22	75	141	20	4	●	●	●
25	90	166	25	4	●	●	●
26	90	166	25	5	●	●	●
28	90	166	25	5	●	●	●
30	90	166	25	5	●	●	●
32	106	186	32	6	●	●	●

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock