


Frese frontali, serie corta

Schafffräser kurze Ausführung

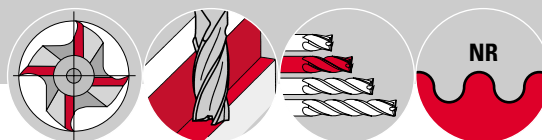

Tipo NR, $\approx 30^\circ$ elica, 14° angolo di spoglia, con codolo conico Morse secondo DIN 228/1


Typ NR, $\approx 30^\circ$ Drallwinkel, 14° Spanwinkel, mit Morsekegelschaft nach DIN 228/1

End mills, short series

Type NR, helix angle $\approx 30^\circ$ rake angle 14° , with straight shank acc. DIN 228/1

Fraises deux tailles série courte

Type NR, angle d'hélice $\approx 30^\circ$, angle de coupe 14° , avec queue cône Morse selon DIN 228/1

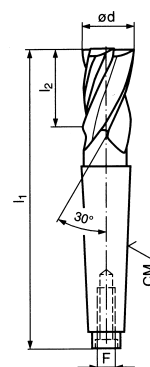

**DIN 845K
HSS-Co5**

HSS-Co5

Cat. Nr. - Kat. Nr. - Cat. no. - No. de cat.						7420	
$\varnothing d_1$ K ₁₂	l_2	l_1	CM	F	Z		
6 [▲]	13	80	1	M 6	4	●	■
8 [▲]	19	89	1	M 6	4	●	■
10	22	92	1	M 6	4	●	●
11	22	92	1	M 6	4	●	■
12	26	96	1	M 6	4	●	●
13	26	96	1	M 6	4	●	■
14	26	111	2	M 10	4	●	●
15	26	111	2	M 10	4	●	●
16	32	117	2	M 10	4	●	●
17	32	117	2	M 10	4	●	■
18	32	117	2	M 10	4	●	●
19	32	117	2	M 10	4	●	■
20	38	123	2	M 10	4	●	●
21	38	123	2	M 10	4	●	■
22	38	123	2	M 10	4	●	●
24	45	147	3	M 12	4	●	●
25	45	147	3	M 12	4	●	●
26	45	147	3	M 12	5	●	●
28	45	147	3	M 12	5	●	●
30	45	147	3	M 12	5	●	●
32*	53	201	4	M 16	6	●	●
34*	53	201	4	M 16	6	●	■
35*	53	201	4	M 16	6	●	■
36*	53	201	4	M 16	6	●	●
38*	63	211	4	M 16	6	●	■
40*	63	211	4	M 16	6	●	●
42*	63	211	4	M 16	6	●	■
45*	63	211	4	M 16	6	●	●
48*	75	261	5	M 20	8	●	■
50*	75	261	5	M 20	8	●	●
56*	75	261	5	M 20	8	●	■
60*	75	261	5	M 20	8	●	■
63*	90	276	5	M 20	8	●	■

● Utensile disponibile a magazzino - Tool in stock - Werkzeug vorrätig ab lager - Outil disponible à stock
 ■ Fino ad esaurimento scorte - Solange der Vorrat reicht - Discontinued available until sold out - Jusqu'à épuisement de stock
 * Tolleranza h 10 - Toleranz h 10 - Tolerance h 10 - Tolérance h 10